
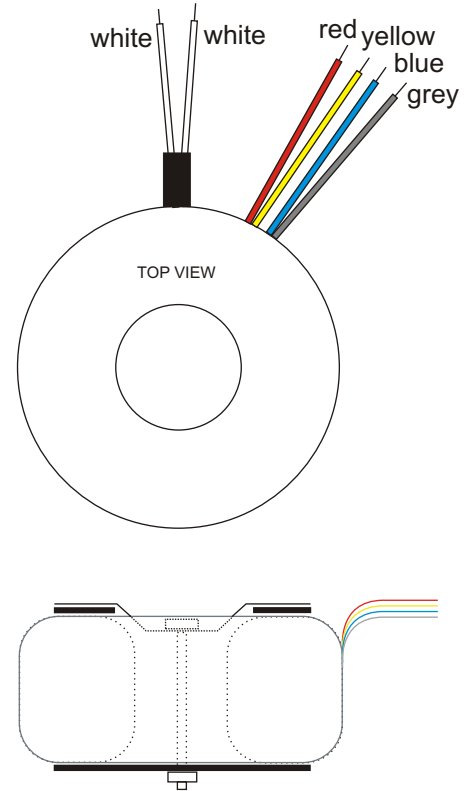
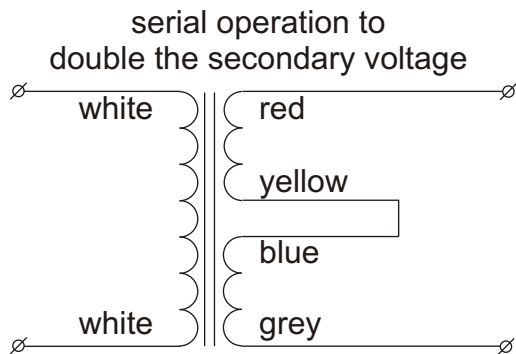
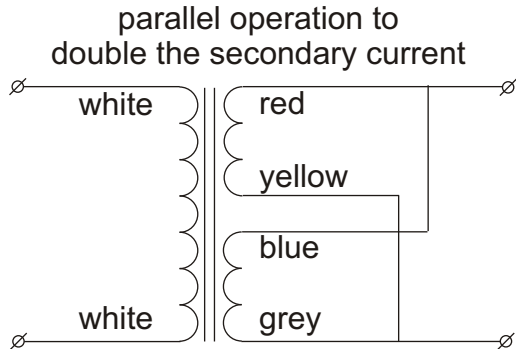


Toroidal transformer type 680xx

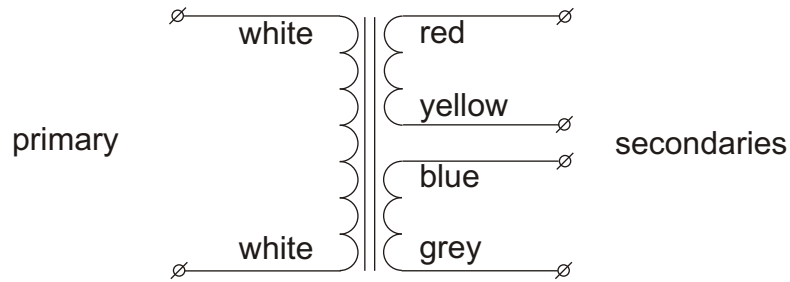

Diameter 110mm
 Height 52mm
 Weight 2.3kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø90mm
 2 neoprene washers Ø90mm
 1 bolt M5x60 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.
 Primary: 1A, 5x20mm, IEC127, high I²t value
 Secondary: none

Type number	primary	secondaries	
		voltage	current
68012	230V	2x 12V	9.38A
68013	230V	2x 15V	7.50A
68014	230V	2x 18V	6.25A
68015	230V	2x 22V	5.11A
68016	230V	2x 25V	4.50A
68017	230V	2x 30V	3.75A
68018	230V	2x 35V	3.21A
68026	230V	2x 40V	2.81A
68025	230V	2x 45V	2.50A
68033	230V	2x 50V	2.25A
68070	230V	2x 115V	0.98A

All voltages are under full ohmic load.
 Regulation : 7%



Vossenbrinkweg 1
 NL-7491DA DELDEN
 The Netherlands

P O - B o x 2 4
 NL-7490AA DELDEN
 The Netherlands
 Tel.+31 (0)74 376 3765
 Fax+31 (0)74 376 3132

info@amplimo.nl
<http://www.amplimo.nl>

HB

April 2003

680xx

**toroidal transformer
 range 225VA**

© Copyright Amplimo BV