

SPECIFICATION

DC POWER: 15V 300mA 1.8W  
 POWER ON: 12V 130mA 5.1W

FUNCTION:


1. 1 SET A/V INPUT, 6 SET A/V OUTPUT
2. INSERTION LOSS: VIDEO 0.5-10MHz -1dB (Max.) ✓  
 AUDIO 20-20KHz -1dB (Max.)

3. ISOLATION LOSS

VIDEO	IN-OUT	POWER OFF	0.5-10MHz	-20dB(Min.)
	OUT-IN	POWER OFF	0.5-10MHz	-20dB(Min.)
	OUT-IN	POWER ON	0.5-10MHz	-30dB(Min.)
	CH-CH	POWER ON	0.5-10MHz	-21dB(Min.)
		POWER OFF	0.5-10MHz	-20dB(Min.)
AUDIO	IN-OUT	POWER OFF	20Hz-20KHz	-50dB(Min.)
	OUT-IN	POWER ON	20Hz-20KHz	-45dB(Min.)

4. RETURN LOSS:

VIDEO IN-OUT POWER ON 0.5-10MHz -12dB(Min.)

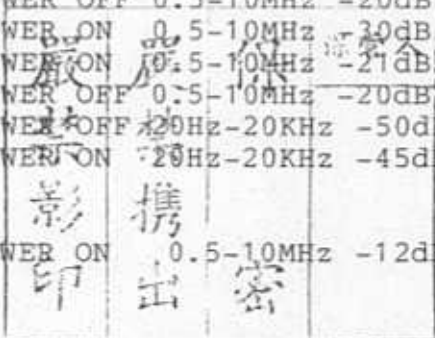

PREPARED BY	<i>[Signature]</i>	Date	8-1-82	REV.		DWG. NO
CHECKED BY	<i>[Signature]</i>	Date	80.5.25	DES.	AV-486	
APPROVED BY	<i>[Signature]</i>	Date	80.5.25			Sheet of 27-1