


POWER SUPPLY HM 203 (Y-Board, partial X-Board)

POWER TRANSFORMER TR 800
(K9590-VI)
PM82x25x0.5
Iron losses 2.8W

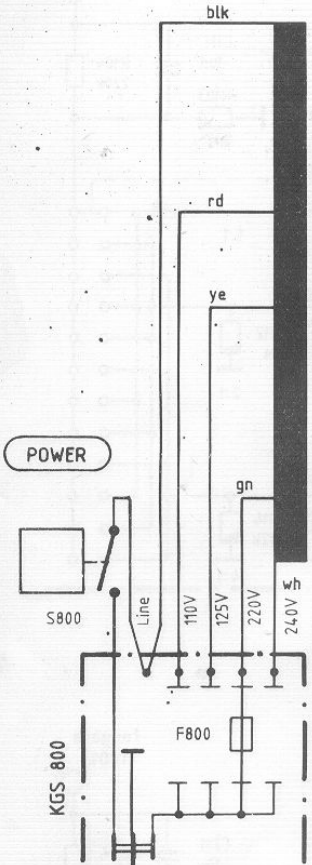

Safety Class I
(With Safety Earth Conductor)
AC 50... 60Hz

POWER FUSE LINKS
Type: IEC 127-III
DIN 41662
SEV 1064
BS 4265
5x20mm, time lag

110 V	} T 0.5A
125 V	
220 V	} T 0.25A
240 V	

WATTS (max.): 39
AMPS. (max.): 0.2
at 220V 50Hz

