


# GP Batteries

## Data Sheet


Model No.: GP330SCHR

Type	: Rechargeable Nickel Metal Hydride Cylindrical Cell	
Nominal Dimension (with Sleeve)	: $\varnothing = 23.0\text{mm}$ H = 44.5mm	
Application	: Discharge current 3.3A to 30A (Continuous) 58A (Momentary)	
Nominal Voltage	: 1.2V	
Nominal Capacity	: Minimum : 3300mAh Typical : 3465mAh when discharged at 660mA to 1.0V at 20°C	
Charging Condition	: 330mA for 16 hrs at 20°C	
Fast Charge	: 1650mA to 3300mA (0.5C to 1C) with charge termination control. Recommended control parameter : - $\Delta V$ : 0-5mV dT/dt : 0.8°C/min (0.5C to 0.9C) 0.8-1°C/min (1C) TCO : 40-45°C  Timer : 105% nominal input (Secondary)	
Service Life	: > 500 cycles (IEC standard)	
Continuous Overcharge	: 330mA maximum current No conspicuous deformation and/or leakage	
Weight	: 62.0g	
Internal Resistance	: Average 5m $\Omega$ upon fully charged (Range : 3-6m $\Omega$ ) at 1000Hz	
Max. Charging Voltage	: 1.5V at 330mA charging	
Ambient Temperature Range	Standard Charging	: 0°C to 40°C
	Fast Charging	: 10°C to 40°C
	Discharging	: -20°C to 50°C
	Storage	: -20°C to 35°C
	Storage (1 week)	: -20°C to 60°C


### Fast Charge (Charge Control required)

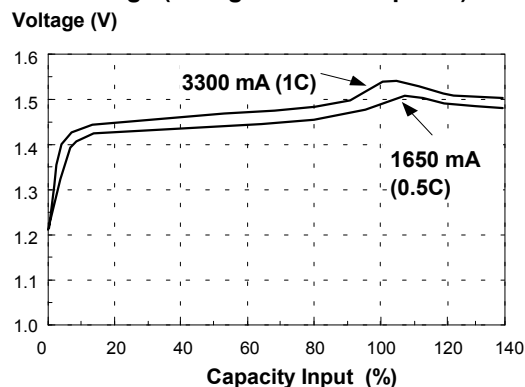

### High Rate Discharge

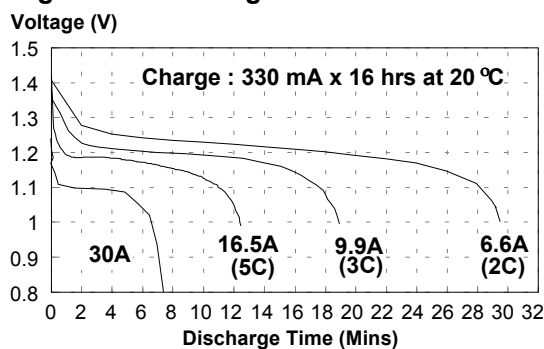

### MPV (V)

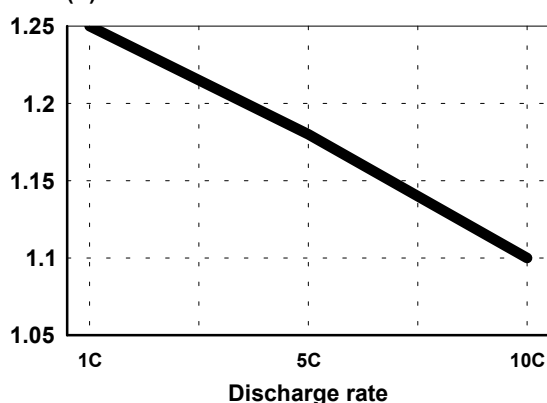

\* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For application other than those described here, please consult GP Sales and Marketing Office or Distributors.

